

# Dismantling information

The document is intended for use by end-of-life recyclers or treatment facilities. It provides the basic instructions for the disassembly of LG products to remove components and materials requiring selective treatment.

## Product Identification

<b>Type of Product</b>	<b>LED TV</b>
<b>Model name</b>	<b>QLED99 Series, QLED96 Series, QLED91 Series</b> <b>This document covers derivation model 65/75/86QLED99##, 65/75QLED96### 65/75/86QLED91### which has same conceptual design and dismantling process</b>

Displays must be stored in accordance with the requirements stipulated in Appendix VIII (1) or (2) of Directive 2012/19/EU and must, amongst other things, be stored in a weatherproof manner. Containers with covers must be used when storing and transporting the Displays.

## Contents

- 1. Materials and components for Selective Treatment**
- 2. Tools Required**
- 3. Product Dismantling Process**



# 1. Materials and components for Selective Treatment

Displays may contain hazardous substances like Pb and BFRs which are covered by exemptions under the RoHS directive. However, the majority is present in the PCB assembly. In order to reduce emissions as much as possible, a complete disposal of the old appliance is required. This treatment may only be performed in authorized handling plants.

Materials and components	Notes	Included
Printed Circuit Boards (PCB) or Printed Circuit Assemblies (PCA)	With a surface greater than 10 square cm	O (main, power, T-con, IR, Wi fi)
Batteries	For Remote control	O
	Internal coin batteries	-
Mercury containing components	display backlights	-
Liquid Crystal Displays (LCD) with a surface greater than 100 square cm (or OLED module for OLED TV)	Includes background illuminated displays with gas discharge lamps	O
Capacitors / condensers (Containing PCB / PCT)		-
Electrolytic Capacitors / Condensers measuring greater than 2.5 cm in diameter or height		O
External electric cables cords	Power cord	O
Gas Discharge Lamps		-
Plastics containing Brominated Flame Retardants		-
Components and waste containing asbestos		-
Components, parts and materials containing refractory ceramic fibers		-
Components, parts and materials containing radioactive substances		-

## 2. Tools Required


List the type that would typically be used to disassemble the product to a point where components and materials requiring selective treatment can be removed.

Tool Description	Tool information
<b>Screw driver</b>	
<b>Paddle( hera)</b>	

# 3. Product Dismantling Process

## 1. Batteries

Batteries can easily be removed from the remote control once the back cover of the remote control has been removed.

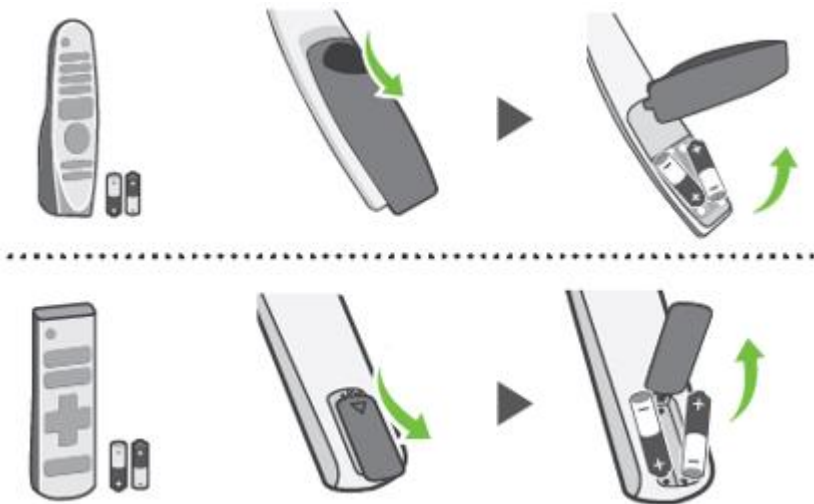


# 3. Product Dismantling Process

## 2. PCBs and LCD Module

- The back cover top of the display can be removed by screw driver and paddle.

1. Disassemble B/C screw (use screw driver)

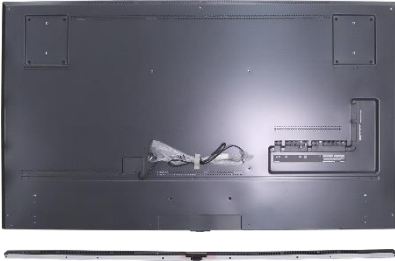

2. Disassemble the latch using paddle to remove



- Once removed, this will expose the accessible electronic units (PCBs) which can now be easily removed with screw driver and hand.

1. Disassemble PCB screw (use screw driver)



2. Disassemble by pulling down the IR and pushing it to the side




3. Disassemble Mechanical part (use screw driver)



- LCD (together with their casing) is only left after all other parts like electronic units have been removed.



Remove the speaker units.

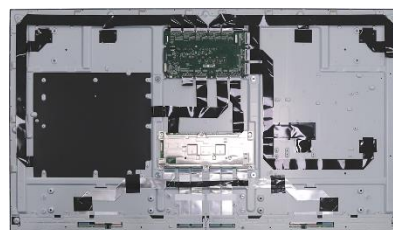


LCD module

## 3. Product Dismantling Process

### 3. Power cord

A Power cord plugged into the back of the display can easily be removed by hand and screw driver

Attached type

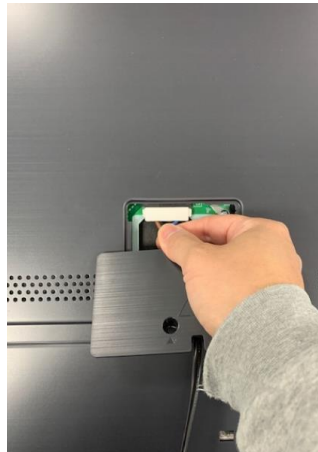

### 4. Capacitors > 25 mm

Capacitors > 25 mm are located in the power supply units and can be removed by nipper

